

BOLiN

NDI High Bandwidth Indoor PTZ Camera



R9-418N

4K NDI PTZ Camera with 1.0-type Exmor R CMOS Sensor

The R9-418N indoor PTZ camera is equipped with Sony 1 Inch large 4K CMOS sensor image block with 18x zoom range Zeiss lens to provide 4K30/Full HD(1080P60) extreme high-quality Ultra High-Definition image to output HDMI, 6G-SDI, Optical SDI, and NDI video streaming for NDI® and are fully compatible with NDI-enabled hardware and software.

R9-418N

KEY FEATURES




- NDI Certified, NDI 6 Ready, NDI HX3 Supported
- Sony image block with 1 Inch large 4K sensor
- Zeiss Vario-Sonnar T lens with 18X zoom range
- Resolution 4K 2160p29.97, 1080i59.94, 1080p60
- IP Video Resolution: Up to 2160p30, 1080p60
- Video Output: Simultaneous 6G-SDI, HDMI, NDI
- SFP Optical SDI video output
- Black Level, Color Matrix, Image Stabilizer
- Visca Over IP, Onvif, FreeD, Serial Control Supported



IMAGE MODULE

- R9-418N NDI 4K PTZ Camera produces brilliant broadcast-quality color images in 4K30 and Full HD with excellent low-light sensitivity.
- 1 inch type Exmor R CMOS large sensor, 14.4 Megapixels
- Zeiss Vario-Sonnar T lens, Zoom Range 18X at 4K, 24X at FHD
- Constant aperture of F2.8, excellent low light sensitivity
- Full HD footage can be captured at 1080p60 optimal for fast, spontaneous action events.
- Optical Image Stabilizer
- The camera can also be operated in 23.98p/24p mode for Cinematic video.
- Black Level
- Color Matrix
- ND Filter
- True WDR

SONY

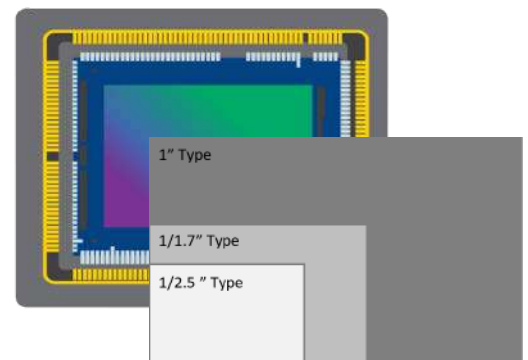

FPGA Hardware Codec



NDI 6 Ready

Interoperability | Low Latency | High Quality

R9-418N Output Interface

NDI 6	NDI HX3	RTSP, RTMP, RTMPS, SRT	True Dual-Output
Dual 6G-SDI	HDMI 2.0	SFP Optical SDI	Genlock
All Video with Audio Embedded	XLR Broadcast Audio Input/Output	FreeD	Serial/IP Control

Full Broadcast SDI Format and Standard

Full Format

3840 x 2160P 30/29.97/25/24/23.98
1920 x 1080P 60/59.94/50/30/29.97/25/24/23.98
1920 x 1080i 60/59.94/50
1280 x 720P 60/59.94/50

SDI Standard

SMPTE 292M
SMPTE 296M (1.5Gb/s)
SMPTE 424M
SMPTE 274M
SMPTE 425-A (3Gb/s)
SMPTE 2081(6Gb/s)
SMPTE 2082-1(12Gb/s)
With SMPTE352 SDI Metadata Supported

FEATURES


FreeD Protocol Integrated for VR/AR Video Production

FreeD helps provide all the axis data needed for a Bolin PTZ camera to intelligently and smoothly pan, tilt, and zoom while following designated objects and people. Broadcasters can combine Bolin's FreeD-enabled PTZ cameras with available, sophisticated software to automate complex camera operations with spectacular results. It is especially useful for virtual live video productions with baseband video feeds and, with Bolin PTZ cameras, with ultra-low latency AV Over IP streaming




Various Control Methods

- IP Control, Serial Control, IR Remote Control, Rest API-Software Control
- Protocol Supported: NDI Control, VISCA Over IP, ONVIF, VISCA, PELCO P/D, FreeD
- NDI Control is fully compatible with NDI Ecosystem, Tricaster, vMix, OBS, ProPresenter, etc.

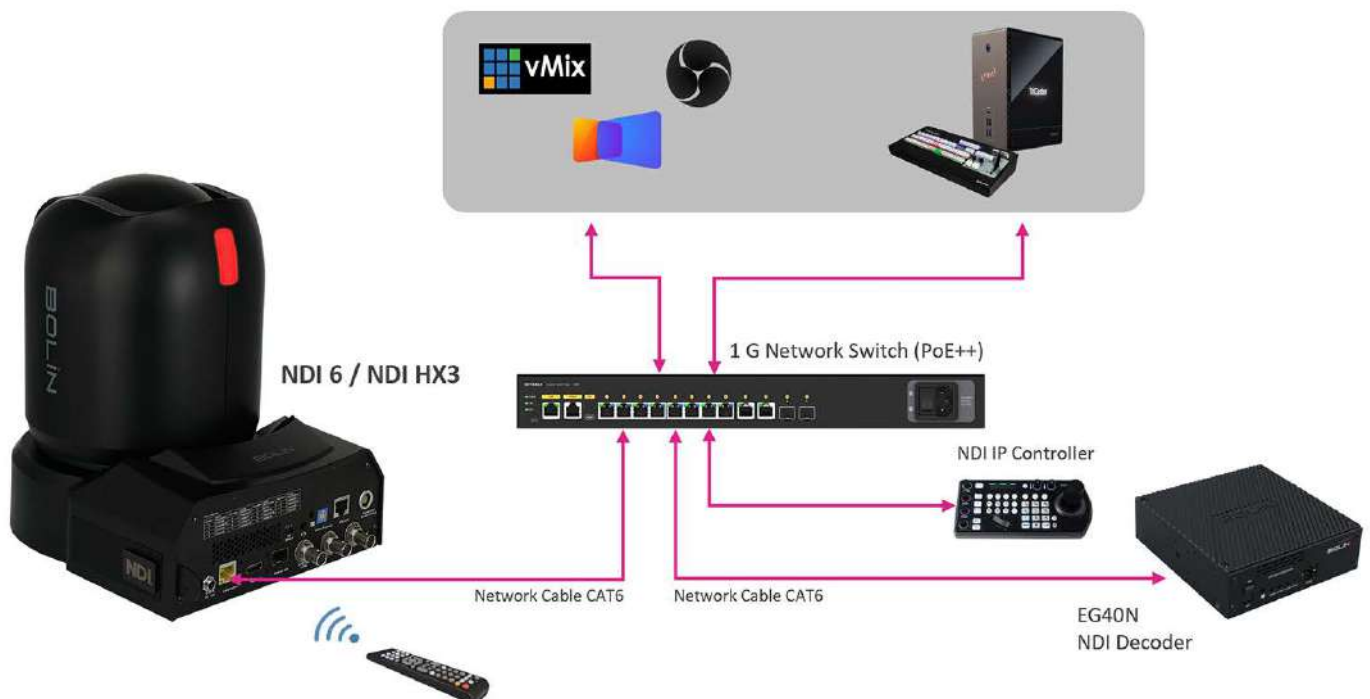


OUTPUT

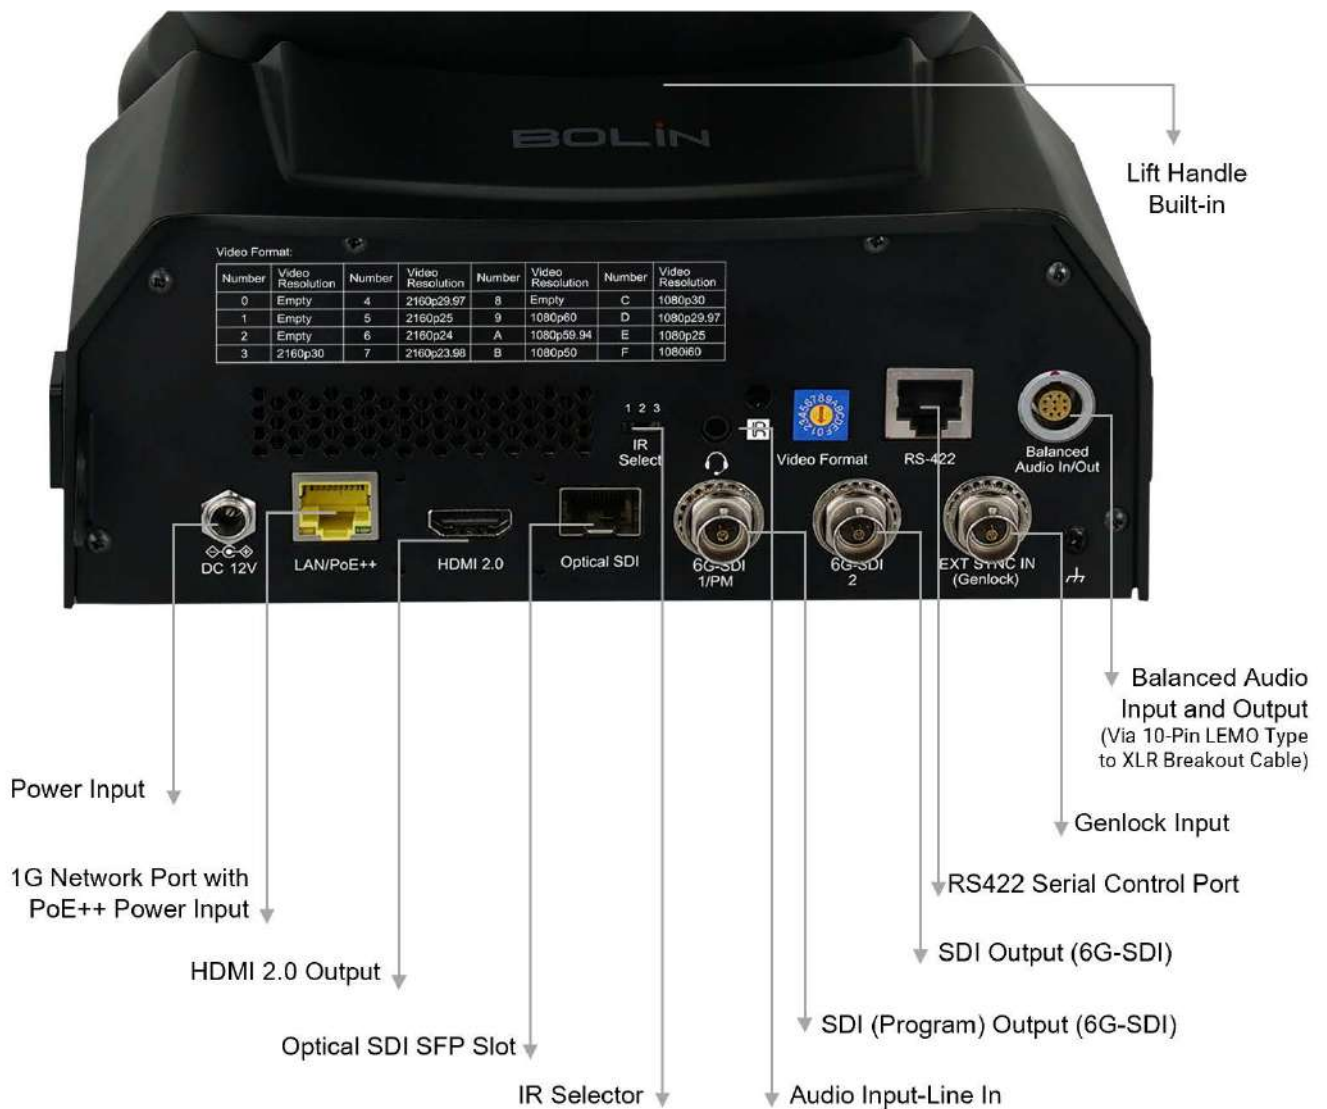

- Dual 12G-SDI
- HDMI 2.0
- 4K IP Streaming - AVC/HEVC
- SFP Optical SDI
- External Synchronization Genlock
- Audio embedded with all video output
- XLR broadcast audio input/output
- On-screen character generator

True Tri-Output

Simultaneously output SDI, HDMI, and IP, which can be set to independent formats for different application use. (The image shows video format model specific)

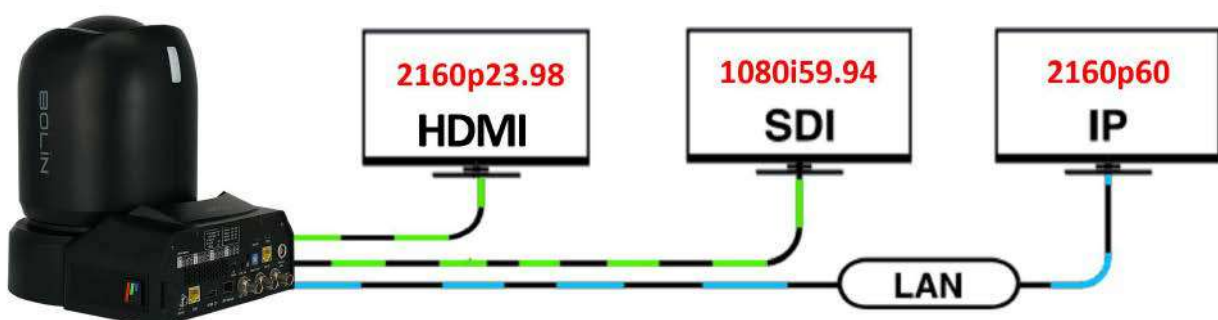

MOVEMENT

Smooth and Accurate Movement

- PAN: 340° (-170° to +170°); Fully proportional speed 0.01° to 100°/s
- TILT: 120° (-30° to +90°); Fully proportional speed 0.01° to 50°/s
- Preset: 255 positions, Speed 100°/s, 0~5 Level Adjustable, Accuracy: 0.03°
- Picture Profile Preset
- Motionless Preset
- PTZ Trace Memory
- Quiet - Less than NC35



FEATURES

- On-screen character generator
- All firmware upgrade via IP
- Front and Rear Tally Light
- POE++ and 12VDC/AC
- Built-in handle
- Genlock
- HDMI cable secure mount
- Available Color: Black, White



Move, with you

- Industry-First unique portable body design
- Facilitates your video production installation.

Move • With You



SPECIFICATIONS

Model Number	R9-418N
Codec	FPGA Based NDI High Bandwidth
Camera Image	18X 4K30/FHD
Image Maker	Sony Image Block
Image Sensor	1.0-type back-illuminated Exmor R CMOS sensor
Number of effective pixels	14.2 MP
Picture elements	3840 x 2160, 8.29 MP
Lens	Zeiss Vario-Sonnar T lens, Zoom Range 18X(4K)/24X(FHD)
Tele Convert Mode	-
Digital Zoom	-
Horizontal Angle of View	64.6° (Wide) - 6.1° (Tele),
Vertical Angle of View	39.2° (Wide) - 3.4° (Tele),
Focal Length	f=9.3 to 111.6mm, F2.8(Wide), F4.5(Tele)
Min. object distance	80mm (Wide), 1000mm (Tele)
Aperture	F2.8 Constant (W)~F4.5(T), 16 Steps
Min. Illumination	0.5 lx (1/30 sec, 50%, High Sensitivity On) 2.0 lx (1/30 sec, 50%, High Sensitivity Off)
Shutter Speed	1/1 sec to 1/10000 sec (28 steps)
Focus	Spot Focus, Auto Focus(Trigger/Interval), Manual Focus(Variable Speed), One Push Trigger, Near Limit,
White Balance	AUTO, ATW, Indoor, Outdoor, One Push WB, Manual WB, Outdoor Auto, Sodium Vapor Lamp (Fix/Auto/Outdoor Auto)
Exposure	Full Auto, Gain, Shutter Priority, Iris Priority, Manual, Bright
Features	High Sensitivity, Backlight Compensation, HLC, E-FLIP, Mirror, Day/Night
WDR	YES(130dB), Shown as VISIBILITY ENHANCER in OSD
ND Filter	Yes
Image Stabilizer	YES, Optical Image Stabilizer
Color Gain	Yes (15 step)
Color Hue	Yes (15 step)
Gamma	Standard/Straight/Pattern
Gamma Level	Yes (15 step)
Black Level	Yes (97 step)
Black Gamma	Yes (15 step)
Color Matrix	Off/Standard/High Saturation/FL light
Noise Reduction	On/Off (level 5 to 1 / Off, 6 steps), 2D/3D
S/N Ratio	≥50db
HLC	Yes
E-Flip	Yes
Privacy Zone Masking	Yes
Defog	Yes, (off, low, mid, high)
High Sensitivity	Yes
Slow AE Response	Yes
Day/Night	Yes
Backlight Compensation	Yes
Mechanical	
Pan Movement	PAN: 340° (-170° to +170°); Fully proportional 0.05° to 100°/s
Tilt Movement	TILT: 120° (-30° to +90°); Fully proportional 0.05° to 75°/s
Speed Proportional	Pan/Tilt Speed proportional to zoom range
Preset Position	255 positions, Speed 100°/s, 0-5 Level Adjustable, Accuracy: 0.1°
Preset Memory	Picture Profile Preset-Preset Memory for image parameters: Backlight Compensation, White Balance, R-Gain/B-Gain, Auto Exposure, Bright, Iris, Shutter, Gain, Aperture, Effect, Noise Reduction, Mirror, Gamma, Ex-COMP, Color Hue, Contrast etc.)
Motionless Preset	YES, ON/OFF
PTZ Trace Memory	YES, 12
Cruise	YES, 4
Quietness	NC35 Compliant
Home Position	Yes
FreeD	Yes, FreeD protocol for AR/VR camera tracking, via serial control/IP (Via fw upgrade)
Environmental	Indoor, IP50
Interface	
HDMI Video Output	HDMI 2.0 Type A
SDI Video Output	6G-SDI, SMPTE424M /SMPTE292M /SMPTE 296M / SMPTE 274M /SMPTE ST-2081 standards, 75Ω BNC x 2 SDI/PM for output with OSD display
SDI Optical Fiber Output	Optical 12G-SDI (Module Excluded), Detachable slot, Connector: Duplex LC (optional via ST, LC or SMPTE) Laser Unit: Single-mode 1,310nm DFB-LD transmitter and PIN receiver Complaint with MSA SFP+ Specification SFF-8402.
Network LAN Port	RJ45X1, Standard 10M/100M/1000M Base-TX Ethernet, LAN connector for IP control/video output/audio output/System FW Upgrade
Synchronization System	Internal/External synchronization (BBS/Tri-level sync)
External Sync Input	Genlock, BNC connector, BBS (Black Burst Sync), tri-level sync supported
Audio Input	Balanced XLR (Hirose Connector via Atomos 10-Pin LEMO Type to XLR Breakout Cable) with 48V Phantom power 3.5mm TRRS for bidirection audio intercom
Audio Output	Balanced XLR (via Atomos 10-Pin LEMO Type to XLR Breakout Cable), embedded with HDMI, SDI, USB and IP 3.5mm TRRS for bidirection audio intercom
Tally Light	Red, Green Color/Front and Rear
Dip Switch	Video Resolution Dip Switch x1
System Firmware Upgrade	Upgrade via IP for camera system MCU, Driver, FPGA and Encoder
Power Connector Type	INPUT: DC12V, connect with screw secure (Type - 5.5mmx2.1mm Male DC Power Plug Connector & Screw Lock Female Panel Socket Mount) INPUT: RJ45, PoE++ (IEEE802.3bt)
Control Interface	RJ45X1-RS422, RJ45X1-IP Control, IR Remote Control
Control Protocol	Serial: VISCA, PELCO P/D; IP: VISCA Over IP, ONVIF; FreeD (via Hw Upgrade)

SPECIFICATIONS

Model Number	R9-418N
Codec	FPGA Based NDI High Bandwidth
HDMI Video Signal System	
HDMI Video Format	3840 x 2160p/29.97/30/25/23.98/24 1920 x 1080p/59.94/60/50/29.97/30/25/23.98/24 1920 x 1080i/59.94/60/50 1280 x 720p/59.94/60/50
Color Precision	12bit(HDMI), YUV4:2:2, YUV4:2:0
Color Space	YUV, RGB
OSD Menu Display	Yes, with image insert
On-Screen Title	Yes, video embedded On-Screen title character generator
SDI Signal Format	
SDI Video Format	3840 x 2160p/29.97/30/25/23.98/24 1920 x 1080p/59.94/60/50/29.97/30/25/23.98/24 1920 x 1080i/59.94/60/50 1280 x 720p/59.94/60/50
Color Precision	10bit(SDI), YUV 4:2:2
Color Space	YUV
Standard	SMPTE 292M, SMPTE 296M (1.5Gb/s), SMPTE 424M, SMPTE 274M, SMPTE 425-A (3Gb/s), SMPTE 2081(6Gb/s), SMPTE 2082-1 (12Gb/s) standard / 75 Ω (BNC x 1), With SMPTE352 SDI Metadata Supported
True Dual Output	HDMI and SDI signal can be output with different format
OSD Menu Display	Yes
On-Screen Title	Yes, video embedded On-Screen title character generator
Network	
Video Compression (Codec)	NDI High Bandwidth, NDI 6 ready, AVC-H.264/HEVC-H.265/MJPEG/MP4 by FPGA
IP Resolution/Frame Rate	3840x2160p30/25, 1920x1080p60/50/30/25, 1280x720p60/50
True Dual Output	IP, HDMI, and SDI signal can be set with different format
IP Protocols	TCP/IP, IGMP, ICMP, ARP, QoS, SNMP, UDP, HTTP, DNS, DHCP, FTP, NTP, UPNP, SRT, NDI
Application Protocols	RTMP, RTSP, RTP Streaming (Unicast, Multicast), MP2TS over UDP (Unicast, Multicast), TS over RTP, TS over SRT, WebRTC, RTSP Encryption, NDI
Color Format	10bit, YUV 4:2:2
Multi-stream	2 stream
Audio Compression	64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2) / 32-128Kbps(AAC-LC) Selectable
OSD	Customized OSD
Compatible Integration	ONVIF2.4 (Profile S/G/T), VISCA Over IP
Bandwidth (results may vary depending on network configuration and management settings.)	160-180Mbps, 4k30 10 bit 4:2:2
	50-60Mbps, 1080p60 10 bit 4:2:2
Latency (Overall latency may increase depending on network configurations)	NDI certified, <100ms
Browser Support	Cross Browser Compatibility - HTML5 support for Microsoft Edge, Google Chrome, Firefox, and Safari
General	
Operating Temperature	-10 °C to 50 °C (-14°F to 122°F)
Operating Humidity	≤80% Suitable for Use (no condensation)
Power Input	DC12V, PoE++(Compatible with IEEE802.3bt, Type 4 Class8)
Power Consumption	Min: 29W (Static state with no movement)
	Max: 50W (Fully loaded operation)
Installation Method	Stand-alone (Upright) or suspended (Pendent) or Tripod
Mount	Ceiling mount, Wall mount, Tripod
Handle	Built-in for portable use application
Size of Tripod Screw Hole	1 x 1/4" safety bond point
Body Color	Black, White
Dimension-Camera	201*253*249mm(W*D*H), 201*253*256(with feet mats)
Net Weight	3.8kg (8.36lb)
Accessories Included	IR Remote controller x1, Power adapter and power cord (US, EU, UK), Mounting screws x3, RJ45 to RS422 Extension cable, Thanks card x1

ACCESSORIES

Items marked * are optional to purchase



VCC-RC-2
IR Remote Controller



VCC-P12-4
12VDC 4A Power Adapter



EG40N
*NDI Decoder



C-PMSB
*Pendant Mount for Drop Ceiling
/Hard Surface Ceiling



C-WM3B
*Wall Mount Bracket-Size 3



C-WM2B-CV
*Wall Mount Cover-Size 3



C-WPLB
*Wall Mount Plate



BL-CM-01
*Ceiling Mount Bracket



BL-PP97
*97W POE POWER INJECTOR




BLA-10
*LEMO connector
10Pin Mini to XLR L/R In/Out

ORDER INFORMATION

- R9-418N (4K30/FHD, 18X/24X, NDI, Black)
- R9-418N/W (4K30/FHD, 18X/24X, NDI, White)

DIMENSIONS

Unit: mm

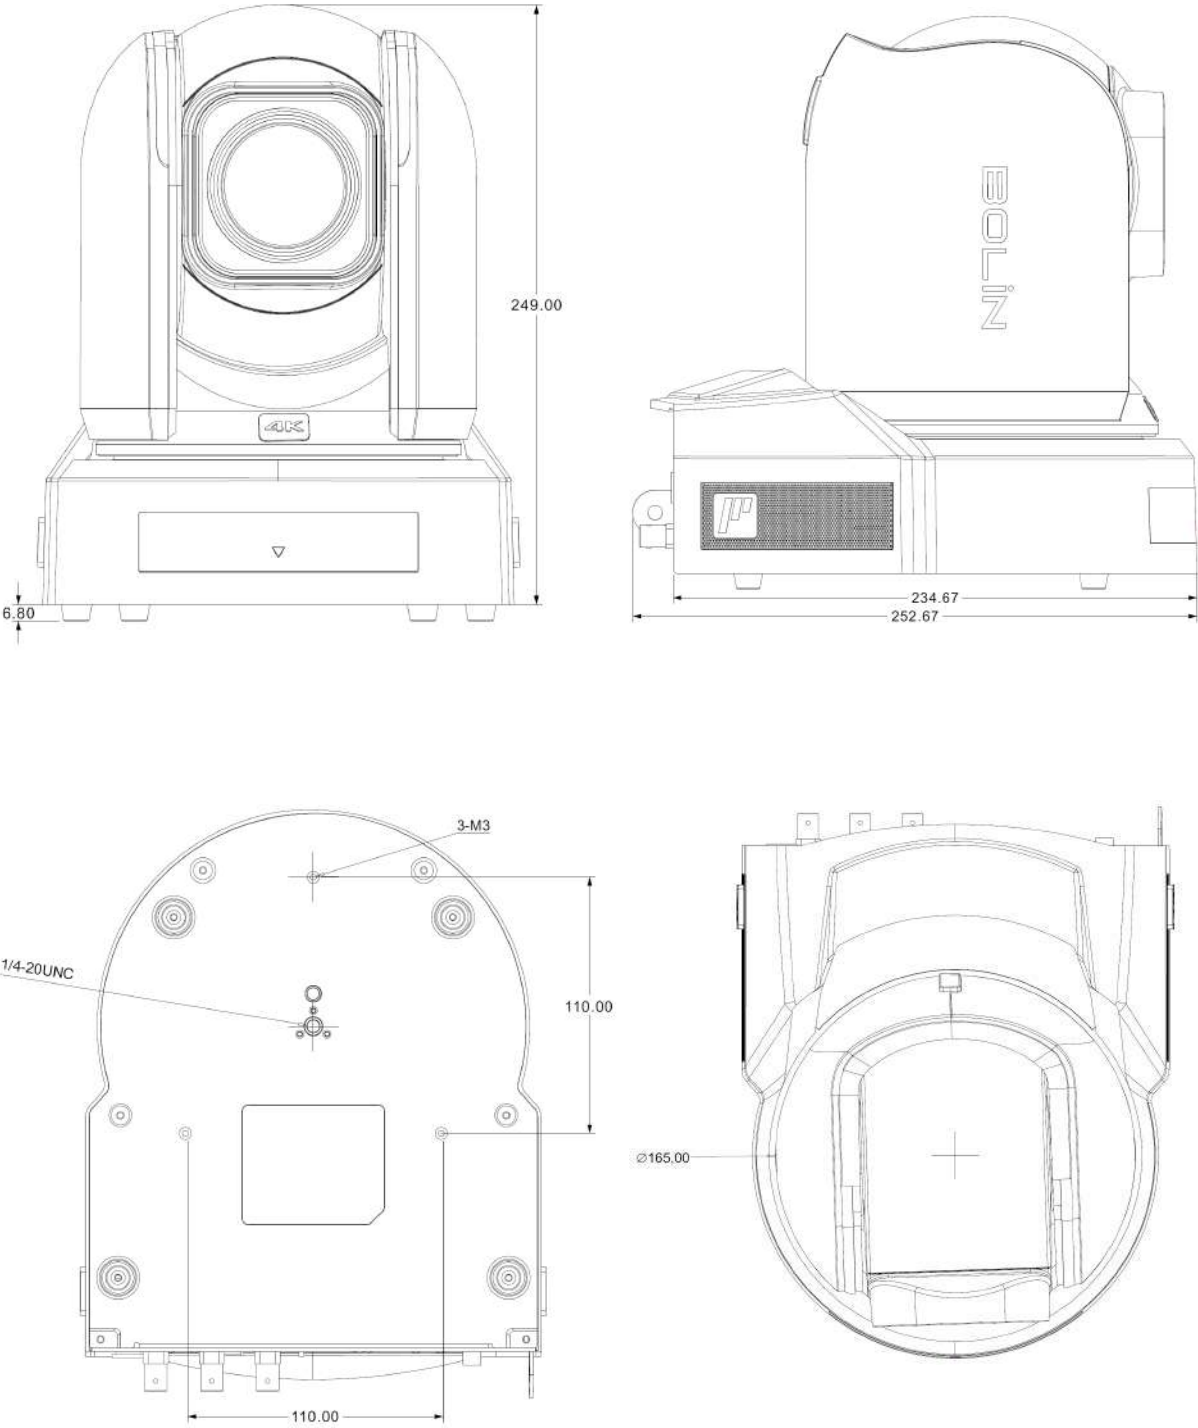

All models and specifications are subject to change without notice.
All brand names and registered trademarks are the property of their respective owners.